


Flex Match Systems

Multi-Zone Mini-Split Heat Pump Condensers 18K to 42K BTU – Up to 22 SEER



R-410A

Mix and match with indoor units to make up to 124 different system combinations.

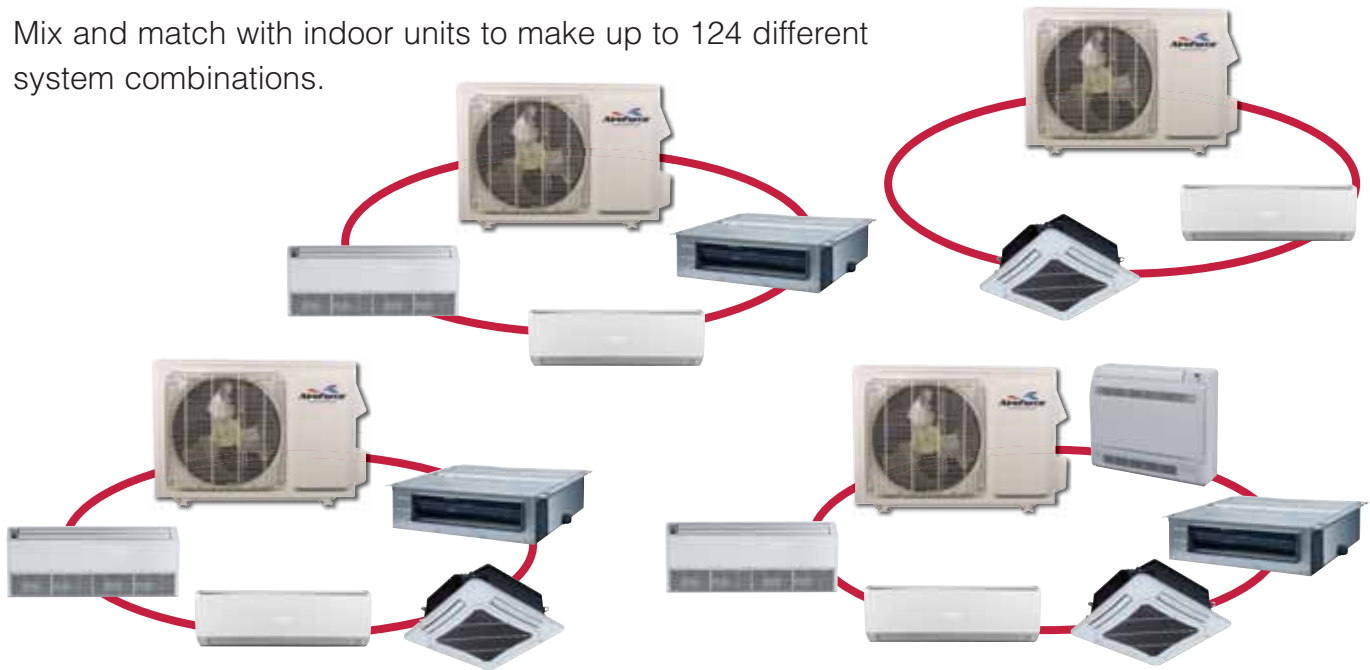

Model		GXH18(5.3)FMK4DH	GXH24(7.0)FMK4DH	GXH30(8.8)FMK4DH	GXH36(10.6)FMK4DH	GXH42(12.3)FMK4DH
Maximum # of Indoor Units		1 to 2	2 to 3	2 to 4	2 to 5	2 to 5
# of Service Valves		2 sets	3 sets	4 sets	5 sets	5 sets
Power Supply	Ph-V-Hz	1-208/230-60				
Cooling/Heating Range	F(C)	23~118°F (-5~48°C)/-4~81°F (-20~27°C)				
Connectable Capacity		50% to 135% of the outdoor unit rating				

Flex Match Systems


Multi-Zone Indoor Units

9K to 24K BTU - Up to 22 SEER



High Wall Unit	Ducted Unit	4-Way Cassette Unit	Console Unit	Floor/Ceiling Unit
GHH09(2.6)LUK4DH	GDH09(2.6)FMK4DH	N/A	GCH09(2.6)FMK4DH	GFH09(2.6)FMK4DH
GHH12(3.5)LUK4DH	GDH12(3.5)FMK4DH	GKH12(3.5)FMK4DH	GCH12(3.5)FMK4DH	GFH12(3.5)FMK4DH
GHH18(5.3)LUK4DH	GDH18(5.3)FMK4DH	GKH18(5.3)FMK4DH	GCH18(5.3)FMK4DH	GFH18(5.3)FMK4DH
N/A	GDH21(6.2)FMK4DH	N/A	N/A	N/A
GHH24(7.0)LUK4DH	GDH24(7.0)FMK4DH	GKH24(7.0)FMK4DH	N/A	GFH24(7.0)FMK4DH

System Piping Information

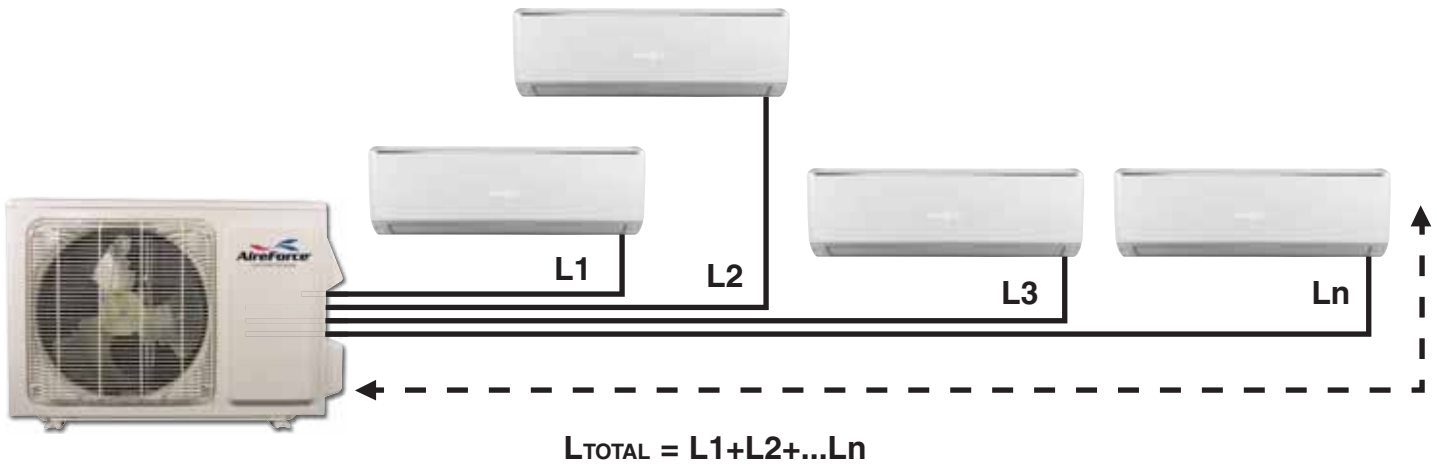


Model Number	Minimum Piping Length Per Indoor Unit (Ln)	Maximum Piping Length Per Indoor Unit (Ln)	Maximum Total Piping Length (L _{TOTAL})
GXH18(5.3)FMK4DH	10	32.8	65.6
GXH24(7.0)FMK4DH	10	65.6	196.8
GXH30(8.8)FMK4DH	10	82.0	229.7
GXH36(10.6)FMK4DH	10	82.0	246.1
GXH42(12.3)FMK4DH	10	82.0	246.1

“L” is the linear equivalent length of liquid line including elbows

Flex Match Systems

System Piping Height Difference Information

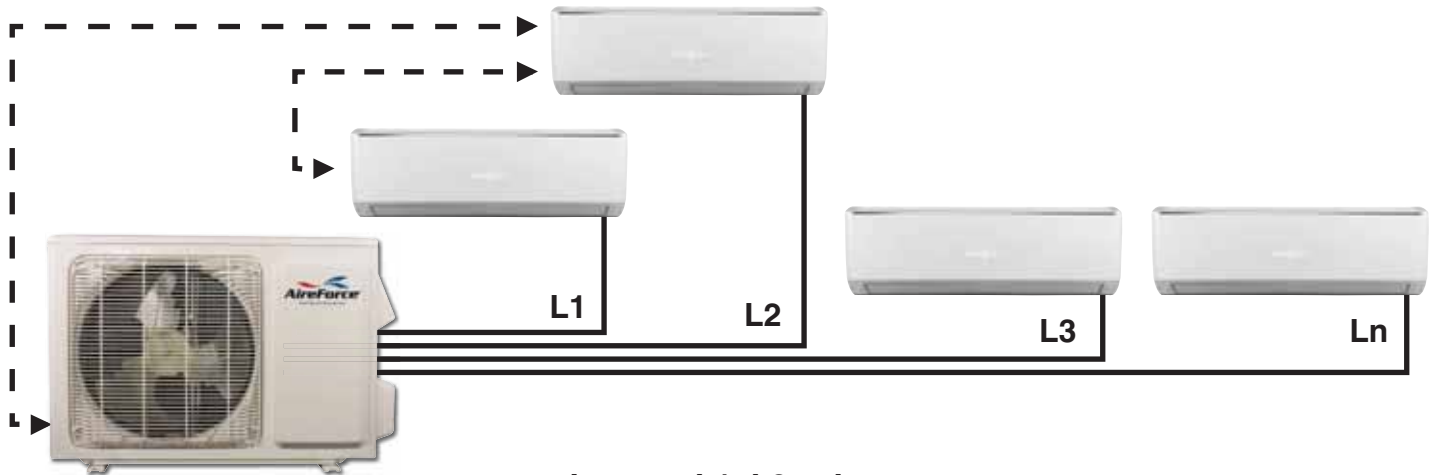

$$L_{TOTAL} = L1 + L2 + \dots + Ln$$

Model Number	Maximum Height Difference Between Indoor and Outdoor Units (H1)	Maximum Height Difference Between Indoor Units (H2)
GXH18(5.3)FMK4DH	32.8	32.8
GXH24(7.0)FMK4DH	32.8	32.8
GXH30(8.8)FMK4DH	49.2	49.2
GXH36(10.6)FMK4DH	49.2	49.2
GXH42(12.3)FMK4DH	49.2	49.2

“H” is the difference in height measured from the piping connections

Easy Installation

Model Number	Precharge Volume in Oz.	Single Indoor Unit Maximum Pipe Length	Add Refrigerant (0.2oz./ft.) If Over	Total System Maximum Pipe Length
GXH18(5.3)FMK4DH	56.4	33.0	33.0	66.0
GXH24(7.0)FMK4DH	77.6	66.0	98.0	197.0
GXH30(8.8)FMK4DH	98.8	82.0	131.0	230.0
GXH36(10.6)FMK4DH	128.8	82.0	131.0	246.0
GXH42(12.3)FMK4DH	128.8	82.0	131.0	246.0



Flex Match Systems

Indoor Unit Piping Connection Sizes				
Type	Picture	Model	"Liquid"	Gas
Wall Mounted		GHH09(2.6)LUK4DH	1/4"	3/8"
		GHH12(3.5)LUK4DH	1/4"	1/2"
		GHH18(5.3)LUK4DH	1/4"	5/8"
		GHH24(7.0)LUK4DH	1/4"	5/8"
Ducted		GDH09(2.6)FMK4DH	1/4"	3/8"
		GDH12(3.5)FMK4DH	1/4"	3/8"
		GDH18(5.3)FMK4DH	1/4"	1/2"
		GDH21(6.2)FMK4DH	3/8"	5/8"
Ceiling Cassette		GDH24(7.0)FMK4DH	3/8"	5/8"
		GKH12(3.5)FMK4DH	1/4"	3/8"
		GKH18(5.3)FMK4DH	1/4"	1/2"
		GKH24(7.0)FMK4DH	3/8"	5/8"
Console		GCH09(2.6)FMK4DH	1/4"	3/8"
		GCH12(3.5)FMK4DH	1/4"	3/8"
		GCH18(5.3)FMK4DH	1/4"	1/2"
Floor Ceiling		GFH09(2.6)FMK4DH	1/4"	3/8"
		GFH12(3.5)FMK4DH	1/4"	3/8"
		GFH18(5.3)FMK4DH	1/4"	1/2"
		GFH24(7.0)FMK4DH	3/8"	5/8"

Note: The line set size will be the size of the connection at the indoor unit and a piping adapter is used at the outdoor unit. Example: the GHH24(7.0)LUK4DH will have a 1/4" and 5/8" line set from the indoor unit to the outdoor unit. The largest-sized lineset should connect to the largest-sized circuit on the outdoor unit.

Flex Match Multi-Zone Design Considerations

2 to 5 Zones - Up to 22 SEER



Matching outdoor unit capacity to 100% of the load provides better performance, longer life and room for expansion.

Example: If load is 36K Btu/h, use 36K condenser, not 30K.

Selection Process

STEP 1 - Determine # of zones

STEP 2 - Determine loads for each zone

STEP 3 - Check connectable capacity range

STEP 4 - Select condenser

STEP 5 - Select indoor units staying within connectable capacity range

Flex Match Configuration 1 - Quick Match Load Reference

Flex Match systems are designed to operate efficiently within connectable capacity ranges from 50% of outdoor unit capacity up to 135% of capacity.

Outdoor Unit Connectable Capacity Ranges

Connectable Capacity Range	50%	135%
GHX18FMK4DH	9K	24K
GHX24FMK4DH	12K	32K
GHX30FMK4DH	15K	41K
GHX36FMK4DH	18K	49K
GHX42FMK4DH	21K	57K*

Indoor Unit Capacities (or options)

	9K	12K	18K	21K	24K
Wall Hung	•	•	•		•
Ducted	•	•	•	•	•
Cassette		•	•		•
Console	•	•	•		
Floor Ceiling	•	•	•		•

Mix and match indoor styles within connectable capacity ranges

Indoor Unit Combination Capacities

Flex Match Indoor Unit Combinations					
Two	K Btu	Three (continued)	K Btu	Four	K Btu
9+9	18	9+9+24	42	9+9+9+9	36
9+12	21	9+12+12	33	9+9+9+12	39
9+18	27	9+12+18	39	9+9+9+18	45
9+21	30	9+12+21	42	9+9+9+21	48
9+24	33	9+12+24	45	9+9+9+24	51
12+12	24	9+18+18	45	9+9+12+12	42
12+18	30	9+18+21	48	9+9+12+18	48
12+21	33	9+18+24	51	9+9+12+21	51
12+24	36	9+21+21	51	9+9+12+24	54
18+18	36	9+21+24	54	9+12+12+12	45
18+21	39	12+12+12	36	9+12+12+18	51
18+24	42	12+12+18	42	9+12+12+21	54
21+21	42	12+12+21	45	12+12+12+12	48
21+24	45	12+12+24	48	12+12+12+18	54
24+24	48	12+18+18	48	Five	K Btu
Three	K Btu	12+18+21	51	9+9+9+9+9	45
9+9+9	27	12+18+24	54	9+9+9+9+12	48
9+9+12	30	12+21+21	54	9+9+9+9+18	54
9+9+18	36	18+18+18	54	9+9+9+12+12	51
9+9+21	39	—	—	9+9+12+12+12	54

* Combinations of 57K are reachable, but not recommended

Flex Match Configuration 2 - Condenser Zone Range

Flex Match Indoor Unit Combinations - Zone Range

		2	2 to 3	2 to 4	2 to 5	2 to 5			2	2 to 3	2 to 4	2 to 5	2 to 5
Indoor Combinations		Condenser Range					Indoor Combinations		Condenser Range				
9+9	18	18K	24K	30K	36K	42K	9+18+18	45	36K	42K			
9+12	21						12+12+21	45					
12+12	24						9+9+9+18	45					
9+18	27	9+12+12+12					45						
9+9+9	27	9+9+9+9+9					45						
9+21	30	24+24					48						
12+18	30	9+18+21	48										
9+9+12	30	12+12+24	48										
9+24	33	12+18+18	48										
12+21	33	9+9+9+21	48										
9+12+12	33	9+9+12+18	48										
12+24	36	12+12+12+12	48										
18+18	36	9+9+9+9+12	48										
9+9+18	36	9+18+24	51										
12+12+12	36	9+21+21	51										
9+9+9+9	36	12+18+21	51										
18+21	39	9+9+9+24	51										
9+9+21	39	9+9+12+21	51										
9+9+18	39	9+12+12+18	51										
9+12+18	39	9+9+9+12+12	51										
9+9+9+12	39	9+21+24	54										
18+24	42	12+18+24	54										
21+21	42	12+21+21	54										
9+9+24	42	18+18+18	54										
9+12+21	42	9+9+12+24	54										
12+12+18	42	9+12+12+21	54										
9+9+12+12	42	12+12+12+18	54										
21+24	45	9+9+9+9+18	54										
9+12+24	45	9+9+12+12+12	54										



Flex Match Matrix






Flex Match systems allow you to mix and match indoor units of any available style with outdoor units according to the color matching charts.

Up to 22 SEER

Outdoor Unit Line Up Allowable Combinations

GXH18(5.3)FMK4DH 5 Combinations  For use with any matching color listed at right 9 or 12	One Indoor Unit	Two Indoor Units	
	9	9+9	
	12	9+12	
		12+12	
GXH24(7.0)FMK4DH 8 Combinations  For use with any matching color listed at right 9, 12, or 18	Two Indoor Units	Three Indoor Units	
	9+9	9+9+9	
	9+12	9+9+12	
	9+18		
	9+21		
	12+12		
12+18			
GXH30(8.8)FMK4DH 20 Combinations  For use with any matching color listed at right 9, 12, 18, 21, or 24	Two Indoor Units	Two Indoor Units	Three Indoor Units
	9+9	12+24	9+9+24
	9+12	18+18	9+12+12
	9+18	18+21	9+12+18
	9+21	Three Indoor Units	Four Indoor Units
	9+24	9+9+9	9+9+9+9
	12+12	9+9+12	9+9+9+12
	12+18	9+9+18	
	12+21	9+9+21	
GXH36(10.6)FMK4DH 41 Combinations  For use with any matching color listed at right 9, 12, 18, 21, or 24	Two Indoor Units	Three Indoor Units	Three Indoor Units
	9+9	9+9+9	12+18+18
	9+12	9+9+12	Four Indoor Units
	9+18	9+9+18	9+9+9+9
	9+21	9+9+21	9+9+9+12
	9+24	9+9+24	9+9+9+18
	12+12	9+12+12	9+9+9+21
	12+18	9+12+18	9+9+12+12
	12+21	9+12+21	9+9+12+18
	12+24	9+12+24	9+12+12+12
	18+18	9+18+18	12+12+12+12
	18+21	9+18+21	Five Indoor Units
	18+24	12+12+12	9+9+9+9+9
	21+21	12+12+18	9+9+9+9+12
21+24	12+12+21		
24+24	12+12+24		
GXH42(12.3)FMK4DH 56 Combinations  For use with any matching color listed at right 9, 12, 18, 21, or 24	Two Indoor Units	Three Indoor Units	Four Indoor Units
	9+9	9+9+24	9+9+9+9
	9+12	9+12+12	9+9+9+12
	9+18	9+12+18	9+9+9+18
	9+21	9+12+21	9+9+9+21
	9+24	9+12+24	9+9+9+24
	12+12	9+18+18	9+9+12+12
	12+18	9+18+21	9+9+12+18
	12+21	9+18+24	9+9+12+21
	12+24	9+21+21	9+9+12+24
	18+18	9+21+24	9+12+12+12
	18+21	12+12+12	9+12+12+18
	18+24	12+12+18	9+12+12+21
	21+21	12+12+21	12+12+12+12
	21+24	12+12+24	Five Indoor Units
	24+24	12+18+18	9+9+9+9+9
	Three Indoor Units	12+18+21	9+9+9+9+12
	9+9+9	12+18+24	9+9+9+9+18
9+9+12	12+21+21	9+9+9+12+12	
9+9+18	18+18+18	9+9+12+12+12	
9+9+21			

Indoor Unit Line Up

High Wall Unit												
GHH09(2.6)LUK4DH												
GHH12(3.5)LUK4DH												
GHH18(5.3)LUK4DH												
GHH24(7.0)LUK4DH												
Available in:							Match condenser by color					
9,000							9,000	9,000	9,000	9,000	9,000	9,000
12,000							12,000	12,000	12,000	12,000	12,000	12,000
18,000								18,000	18,000	18,000	18,000	18,000
24,000									24,000	24,000	24,000	24,000
Ducted Unit												
GDH09(2.6)FMK4DH												
GDH12(3.5)FMK4DH												
GDH18(5.3)FMK4DH												
GDH21(6.2)FMK4DH												
GDH24(7.0)FMK4DH												
Available in:							Match condenser by color					
9,000							9,000	9,000	9,000	9,000	9,000	9,000
12,000							12,000	12,000	12,000	12,000	12,000	12,000
18,000								18,000	18,000	18,000	18,000	18,000
21,000									21,000	21,000	21,000	21,000
24,000									24,000	24,000	24,000	24,000
4-Way Cassette Unit												
GKH12(3.5)FMK4DH												
GKH18(5.3)FMK4DH												
GKH24(7.0)FMK4DH												
Available in:							Match condenser by color					
12,000							12,000	12,000	12,000	12,000	12,000	12,000
18,000								18,000	18,000	18,000	18,000	18,000
24,000									24,000	24,000	24,000	24,000
Console Unit												
GCH09(2.6)FMK4DH												
GCH12(3.5)FMK4DH												
GCH18(5.3)FMK4DH												
Available in:							Match condenser by color					
9,000							9,000	9,000	9,000	9,000	9,000	9,000
12,000							12,000	12,000	12,000	12,000	12,000	12,000
18,000								18,000	18,000	18,000	18,000	18,000
Floor/Ceiling Unit												
GFH09(2.6)FMK4DH												
GFH12(3.5)FMK4DH												
GFH18(5.3)FMK4DH												
GFH24(7.0)FMK4DH												
Available in:							Match condenser by color					
9,000							9,000	9,000	9,000	9,000	9,000	9,000
12,000							12,000	12,000	12,000	12,000	12,000	12,000
18,000								18,000	18,000	18,000	18,000	18,000
24,000									24,000	24,000	24,000	24,000

Using combinations other than directed is expressly prohibited.

Flex Match - Product Specifications



Heat Pump Condenser Outdoor Unit

Model	Heat Pump		GXH18(5.3)FMK4DH	GXH24(7.0)FMK4DH	GXH30(8.8)FMK4DH
Capacity	Cooling	Btu/h	18000	26000	29000
	Heating	Btu/h	19000	29000	31600
SEER/HSPF			22.0/9.0	20.5/10.2	21/10.2
Power Supply		Ph-V-Hz	1-208/230-60		
Maximum Over Current Protection		A	25	35	30
Minimum Current (MCA)		A	15	21	19
Refrigerant Charge Volume		lb (kg)	3.5 (1.6)	4.9 (2.2)	6.2 (2.8)
Sound Pressure Level		dB(A)	56	59	
Dimension (WxDxH)	Outline	inch	37 x 16 x 28		39 x 17 x 31
	Package	inch	41 x 18 x 30		43 x 19 x 34
Net Weight/Gross Weight		lb (kg)	114/123 (52/56)	153/164 (69.5/74.5)	145/154 (66/70)
Connecting Pipe Diameter	Suction	inch (mm)	3/8 (9.52)		
	Liquid	inch (mm)	1/4 (6)		
Maximum Drive Indoor Unit Number		Unit	2	3	4

Model	Heat Pump		GXH36(10.6)FMK4DH	GXH42(12.3)FMK4DH
Capacity	Cooling	Btu/h	34000	39000
	Heating	Btu/h	42500	45000
SEER/HSPF			21/10.2	
Power Supply		Ph-V-Hz	1-208/230-60	
Maximum Over Current Protection		A	30	
Minimum Current (MCA)		A	21	24
Refrigerant Charge Volume		lb (kg)	8.0 (3.65)	
Sound Pressure Level		dB(A)	61	
Dimension (WxDxH)	Outline	inch	43 x 17 x 43	
	Package	inch	46 x 19 x 48	
Net Weight/Gross Weight		lb (kg)	198/216 (90/98)	
Connecting Pipe Diameter	Suction	inch (mm)	3/8 (9.52)	
	Liquid	inch (mm)	1/4 (6)	
Maximum Drive Indoor Unit Number		Unit	5	

Size Line Sets by Indoor Unit
 All service valves on Flex Match condensers are 1/4" x 3/8". You must size up at condenser to accommodate indoor unit pipe sizes. Example: Indoor pipe is 1/4" x 1/2", use an adapter at condenser and run 1/2" pipe from condenser to indoor unit.

Flex Match Series Valve Adapters

Certain Flex Match units include line set adapters for use at the outdoor service valves. Used when indoor unit connectors are larger and take precedence.

Model BTU	Supplied Adapters	Size	Accessories
18k	1	3/8 to 1/2	1017000 – 3/8 to 5/8
24k	2	3/8 to 1/2	1017001 – 3/8 to 1/2
30k	8	(2) 3/8 to 5/8, (4) 3/8 to 1/2, (2) 1/4 to 3/8	1017002 – 1/4 to 3/8
36k	8	(2) 3/8 to 5/8, (4) 3/8 to 1/2, (2) 1/4 to 3/8	
42k	9	(3) 3/8 to 5/8, (4) 3/8 to 1/2, (2) 1/4 to 3/8	



Flex Match - Product Specifications

Wall-Mounted Type Indoor Unit



Model			GHH09(2.6)LUK4DH	GHH12(3.5)LUK4DH	GHH18(5.3)LUK4DH	GHH24(7.0)LUK4DH
Capacity	Cooling	Btu/h	9000	12000	18000	22000
	Heating	Btu/h	11000	13000	19790	23000
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)			
Airflow Volume		m ³ /h	520/470/430/370	570/470/430/370	850/780/650/550	1000/800/700/600
		CFM	306/277/253/218	355/277/253/218	500/459/383/324	589/471/412/353
Sound Pressure Level (H/M/L/SL)		dB(A)	42/38/35/32	44/39/36/33	49/44/40/35	53/45/41/37
Connecting Pipe		Suction	inch (mm)	3/8 (9.52)	1/2 (12)	5/8 (16)
		Liquid	inch (mm)	1/4 (6)		
Dimension (WxHxD)		Outline	inch	32 x 7 x 11	37 x 8 x 12	40 x 12 x 9
		Package	inch	36 x 15 x 10	40 x 11 x 16	42 x 16 x 13
Net Weight/Gross Weight		lb (kg)	22/28 (10/12.5)		28/35 (13/16)	30/37 (13.5/17)
Accessories						
Line Set SKU Number with Wire			05-0200	05-0202	1016619	

Floor/Ceiling Type Indoor Unit




Model			GFH09(2.6)FMK4DH	GFH12(3.5)FMK4DH	GFH18(5.3)FMK4DH	GFH24(7.0)FMK4DH
Capacity	Cooling	Btu/h	8533	11900	17000	22780
	Heating	Btu/h	9500	13100	18700	27200
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)			
Airflow Volume		m ³ /h	650		950	1250
		CFM	383		559	736
Sound Pressure Level (H/L)		dB(A)	40/36		45/40	48/44
Connecting Pipe		Suction	inch (mm)	3/8 (9.52)	1/2 (12)	5/8 (16)
		Liquid	inch (mm)	1/4 (6)		3/8 (9.52)
Dimension (WxHxD)		Outline	inch	48 x 28 x 9		
		Package	inch	53 x 32 x 12		
Net Weight/Gross Weight		lb (kg)	88/110 (40/50)			99/119 (45/54)
Accessories						
Line Set 25 Feet SKU Number with Wire			05-0200	05-0202	05-0204	

Note: Line Sets 25 feet or less require no additional refrigerant.

Flex Match - Product Specifications

Cassette Type Indoor Unit

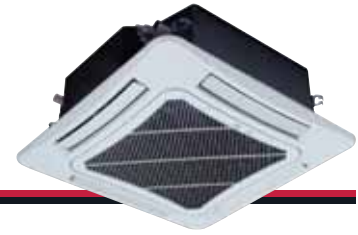

Model			GKH12(3.5)FMK4DH	GKH18(5.3)FMK4DH	GKH24(7.0)FMK4DH
Capacity	Cooling	Btu/h	12000	14400	22800
	Heating	Btu/h	13000	16000	27400
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)		
Airflow Volume		m ³ /h	600		1180
		CFM	353		694
Sound Pressure Level (H/M/L)		dB(A)	46/44/42		39/37/35
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)	1/2 (12)	5/8 (16)
	Liquid	inch (mm)	1/4 (6)		3/8 (9.52)
Main Body	Dimension (WxDxH)	Outline	22 x 22 x 9		33 x 33 x 9
		Package	34 x 29 x 13		38 x 38 x 13
Panel	Net Weight/Gross Weight		39/50 (18/23)		62/77 (28.0/35.0)
	Dimension (WxDxH)	Outline	25 x 25 x 2		37 x 37 x 2
		Package	29 x 26 x 4		41 x 40 x 5
Net Weight/Gross Weight		lb (kg)	5.5/8 (2.5/3.65)		14/22 (6.5/10)
Accessories					
Line Set 25 Feet SKU Number with Wire			05-0200	05-0202	05-0204

Console Type



Model			GCH09(2.6)FMK4DH	GCH12(3.5)FMK4DH	GCH18(5.3)FMK4DH
Capacity	Cooling	Btu/h	9000	12000	18000
	Heating	Btu/h	9500	13000	19800
Power Supply		Ph-V-Hz	1-208/230-60 (Powered by Outdoor Unit)		
Airflow Volume		m ³ /h	500	600	650
		CFM	294	353	383
Sound Pressure Level (H/L)		dB(A)	40/38/36/33/30/27/25	42/40/38/37/35/32/27	48/46/44/41/37/35/32
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)		1/2 (12)
	Liquid	inch (mm)	1/4 (6)		
Dimension (WxHxD)	Outline	inch	28 x 8 x 24		
	Package	inch	31 x 11 x 27		
Net Weight/Gross Weight		lb (kg)	33/40 (15/18)		
Accessories					
Line Set 25 Feet SKU Number with Wire			05-0200		05-0202

Note: Line Sets 25 feet or less require no additional refrigerant.

Flex Match - Product Specifications



Ducted Type Indoor Unit








Model			GDH09(2.6)FMK4DH	GDH12(3.5)FMK4DH	GDH18(5.3)FMK4DH
Capacity	Cooling	Btu/h	8500	11900	15300
	Heating	Btu/h	9500	13100	18700
Power Supply		Ph-V-Hz	1-208/230-60		
Airflow Volume	m ³ /h		450	550	700
	CFM		265	324	412
Sound Pressure Level (H/L)		dB(A)	37/31	39/32	41/33
Connecting Pipe	Suction	inch (mm)	3/8 (9.52)		1/2 (12)
	Liquid	inch (mm)	1/4 (6)		
Dimension (WxHxD)	Outline	inch	27.5 x 24 x 8		35 x 24 x 8
	Package	inch	35 x 29 x 12		44 x 29 x 12
Net Weight/Gross Weight		lb (kg)	49/60 (22/27)	51/64 (23/29)	60/79 (27/36)
Accessories					
Line Set SKU Number with Wire			05-0200		05-0202

Model			GDH21(6.2)FMK4DH	GDH24(7.0)FMK4DH	
Capacity	Cooling	Btu/h	20400	23800	
	Heating	Btu/h	22600	27400	
Power Supply		Ph-V-Hz	1-208/230-60		
Airflow Volume	m ³ /h		1000		
	CFM		588.5		
Sound Pressure Level (H/L)		dB(A)	42/34		
Connecting Pipe	Suction	inch (mm)	5/8 (16)		
	Liquid	inch (mm)	3/8 (9.52)		
Dimension (WxHxD)	Outline	inch	43 x 24 x 8		
	Package	inch	52 x 29 x 12		
Net Weight/Gross Weight		lb (kg)	68/90 (31/41)		
Accessories					
Line Set 25 Feet SKU Number with Wire			05-0204		

Note: Line Sets 25 feet or less require no additional refrigerant.

Flex Match - Product Specifications

Control System Lineup

Controlling System	Product Series	Wall Mounted Type	Ducted Type	Cassette Type	Floor Ceiling Type	Console Type
Wireless Remote Control	RC (16 SEER Single Zone High Wall and WRC-RD Kit for Ducted Style) SKU Number 1007701		●			
	WRC-RD (Wireless Remote Kit for Ducted Style) SKU Number 1007707			●		
	WLRC4F (23 SEER Single Zone Flex Match) SKU Number 1013845		●			
	WLRC3 (Flex Match) SKU Number 1007703			●	●	●
	WLRC6 (Flex Match) SKU Number 1008357					●
Wired Control	WRC3 (Flex Match) SKU Number 1007706			●	●	●
	WRC4 (Single Zone 23 Flex Match) SKU Number 1009614		●			

Note: ● standard ● optional